




CORO™ COLLECTION

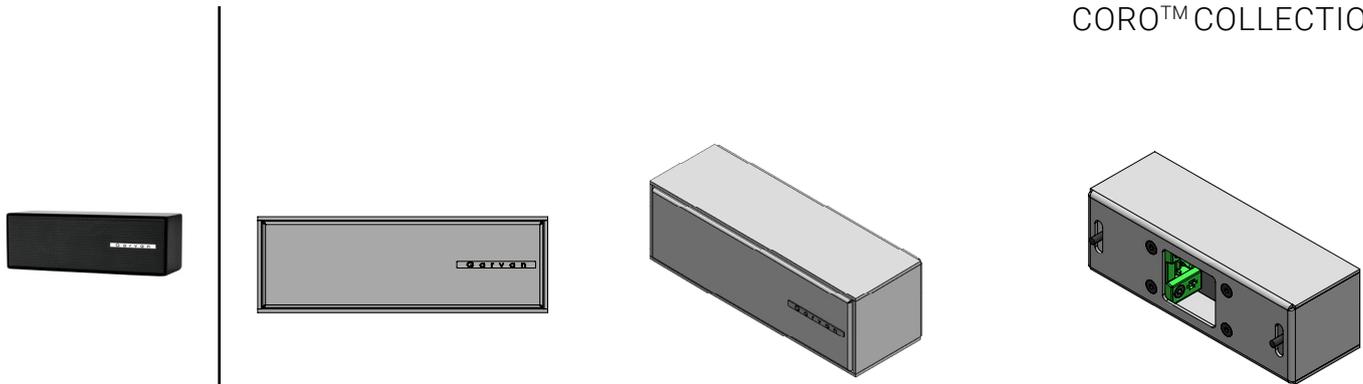

**SCAN OR CLICK TO EXTEND  
YOUR GARVAN WARRANTY FOR FREE!**

3 years included, with the option to add  
2 extra years at no additional cost.

## OVERVIEW DESCRIPTION – UNIQUE DESCRIPTION PRODUCT

The Garvan SA203 is a versatile satellite micro speaker designed for on-wall, bookshelf, or on-ceiling installation. Compact yet powerful, it is crafted in Italy with a refined metal cabinet and stainless steel grille options, delivering both durability and elegance for modern interiors.

Equipped with two 25 mm mid/high drivers, the SA203 ensures accurate sound reproduction with a frequency response from 350 Hz to 16 kHz (-3 dB). Despite its small size, it provides impressive performance with 70 W AES power handling, a calculated maximum SPL of 116.5 dB, and wide coverage exceeding 120°, making it ideal for distributed audio systems or as a complement to subwoofers in larger setups.

Thanks to its closed-box design, the SA203 guarantees controlled and natural sound in a variety of environments, from residential spaces to commercial applications. Installation is simple and flexible across concrete, plasterboard, wood, or modular panels, while accessories such as cover kits and protective grilles further expand customization and integration options.

## KEY FEATURES

Compact satellite micro speaker for on-wall, bookshelf, or on-ceiling use

Transducers: 2 × 25 mm mid/high drivers

Power handling: 70 W AES / 140 W continuous

Sensitivity: 83.5 dB (1W/1m), 86.5 dB (2.83V/1m)

Max SPL: up to 116.5 dB at 1 m

Frequency response: 350 Hz – 16 kHz (-3 dB), 200 Hz – 20 kHz (-10 dB)

Coverage: >120° (1–4 kHz), 90° (1–10 kHz)

Construction: lacquered metal cabinet with galvanic or satin finishes; stainless steel or fabric-covered grille options

Installation: suitable for concrete, plasterboard, wood panels, and modular structures

Connectors: Phoenix connector (supports 18–11 AWG wires)

Warranty: 3 years + 2 additional years with free registration



NAME INSTALLATION	On-Wall / Bookshelf
Type Installation	Bookshelf / On-Wall / On-Ceiling Speaker, closed box
Surface Compatibility	Suitable for installation in, concrete wall, Plasterboard, wooden panels, modular panel, and similar.
Installation Requirements:	Support thickness suitable for product weight
SINGLE LOUDSPEAKER PERFORMANCE	
AES Power Handling	70 W **
Continuous Power Handling ***	140 W **
Sensitivity 2,83V / 1m ****	86,5 dB
Sensitivity 1W/1m ****	83,5 dB
Calculated Maximum SPL @ 1m*	116,5 dB
TRANSDUCER	
Type	mid / high
Nominal size	2x 25mm
Nominal Impedance	4Ω
Loudspeaker EQ	Not required, Garvan Preset EQ, Filter and protection available
Recommended High-Pass Filter Protection	350 Hz with 48 dB/Oct. High pass Filter
Frequency Response (-3 dB)	350 Hz – 16 kHz **
Frequency Range (-10 dB)	200 Hz – 20 kHz
Nominal Coverage Angle (1 KHz - 4 kHz)	> 120°
Nominal Coverage (1 KHz – 10 kHz)	90°
PHYSICAL	
Frame Material	lacquered metal cabinet, galvanic or satin-finish steel
Speaker support Material	Black laquered metal support
Cover	Laquered or galvanic metal Grille. Brushed stainless steel Grille. Fabric covered frame.
ENVIRONMENTAL FEATURES	
Environment of Use	Indoor environments
Operating Temperature Range *****	
environmental protection.	
Connectors	Phoenix connector. Accepts 18 AWG (0.8 mm <sup>2</sup> ) to 11 AWG (4,17 mm <sup>2</sup> ) size wire.
Maximum Ceiling Thickness	
Product Dimensions	
Ceiling Cutout	
Net Weight, Frame	
Net Weight, Loudspeaker	
Net Weight, Cover	

LOGISTICAL DATA	
Packaging dimensions	
Shipping Weight	
Quantity of products per package	1 to 2 based on logistics optimization per shipment
MAINTENANCE	
Cleaning Method	microfiber cloth
General precautions	do not use harsh cleaning products
INCLUDED ACCESSORIES	
OPTIONAL ACCESSORIES	
Transformer for high line voltage	
Transformer for high line voltage	
Cover installation kit	GAR136
Protective Cover	

CABLE SIZE/LOAD SUGGESTIONS			
Cable size/load	8 ohm	4 ohm	2 ohm
2 sq mm.	20m / 65ft.	10m / 32ft	5m / 16ft
2,5 sq mm.	30m / 100ft.	15m / 50ft	7,5m / 25ft
4 sq mm.	60m / 200ft.	30m / 100ft	15m / 50ft

**NOTES:**

\* Maximum SPL calculated from sensitivity and power handling specifications, using a signal with crest factor 4 (12dB), exclusive of power compression.

\*\* With dedicated preset

\*\*\* Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

\*\*\*\* average SPL measured from 200 Hz to 1,5 kHz

\*\*\*\*\* With dedicated ignition and maintenance process

### ON-WALL CODES

1 Loudspeaker **SA203**  
 2 Frame  
 3 Front cover **SFC688-4**

AES POWER **70 W \*\***  
 TYPE **MID / HIGH**  
 NOM. SIZE **2X 25 mm**  
 NOM. IMP. **4Ω**

